

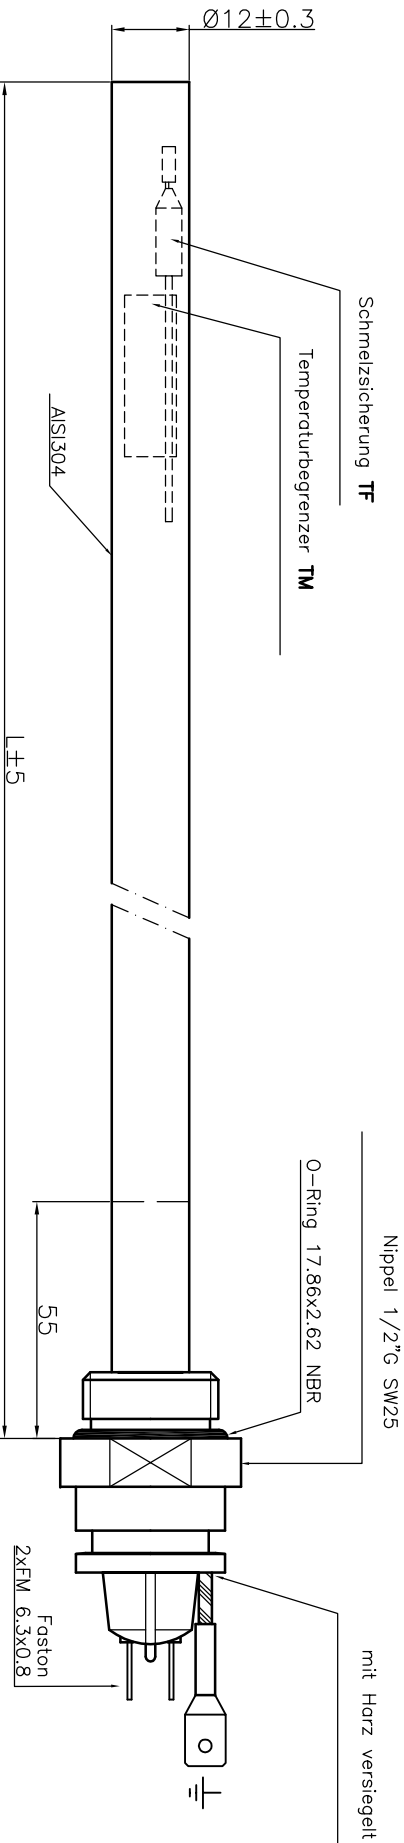


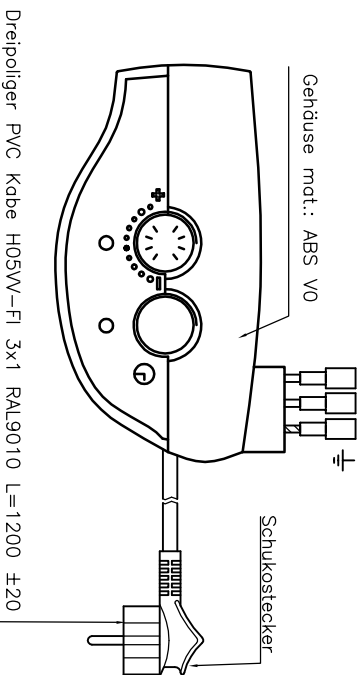

Code	W	L	W/cm²	TM [°C]	TF [°C]
LT44484	300	350	3.9	90	152
LT44485	600	550	4	90	152
LT44486	900	710	4.1	90	152

Watt: W	+5%	Elektrische Prüfungen (bei 20°C±5)	CEI 61-150/EN 60335-1
Volt: 230	-10%	Durchschlagsfestigkeit :	1250 (Volt x 1')
W/cm²		Isolationswiderstand :	5 (Möhm bei 500Vgs)
		Erde Leistung :	0.1 (Ohm)
		Schutzart :	IP44

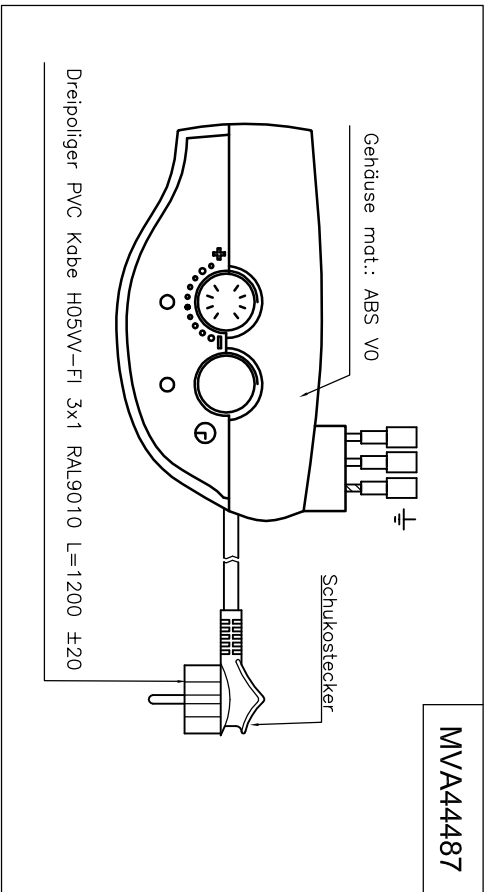

MVA44487